
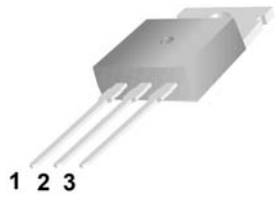
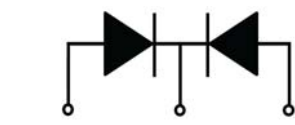


20A SCHOTTKY BARRIER RECTIFIER

<p>MBR20300CT</p> <p>Features:</p> <ul style="list-style-type: none"> <input type="checkbox"/> Low power loss, high efficiency. High surge capacity <input type="checkbox"/> For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications. <input type="checkbox"/> Metal silicon junction, majority carrier conduction. <input type="checkbox"/> High current Capability, low forward voltage drop. <input type="checkbox"/> Guard ring for over voltage protection. 	<p style="text-align: center;">TO-220 </p> <div style="text-align: center;">  </div> <div style="text-align: center;">  <p>1. Anode 2. Cathode 3. Anode</p> </div>
---	---

Absolute Maximum Ratings (Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	300	V
Maximum RMS Voltage	V_{RMS}	210	V
Maximum DC Blocking Voltage	$V_{R(DC)}$	300	V
Maximum Average Forward Current	$I_{F(AV)}$	20	A
Peak Forward Surge Current: 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	150	A
Maximum Forward Voltage	V_F	0.95	V
Maximum DC Reverse Current	I_R	Tj=25°C	0.1 mA
		Tj=125°C	20 mA
Maximum Operating Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	-55~+150	°C

20A SCHOTTKY BARRIER RECTIFIER

Typical Characteristics

RATING AND CHARACTERISTIC CURVES

FIG. 1 – FORWARD CURRENT DERATING CURVE

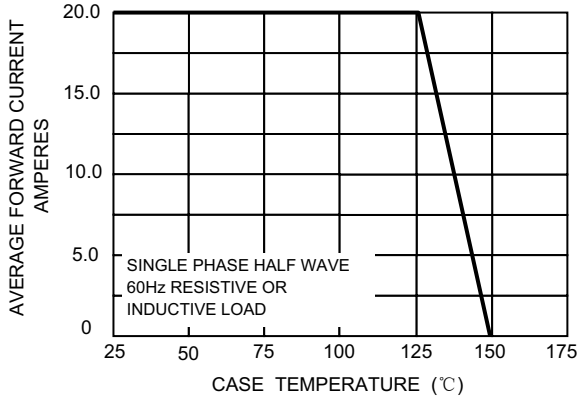


FIG. 2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

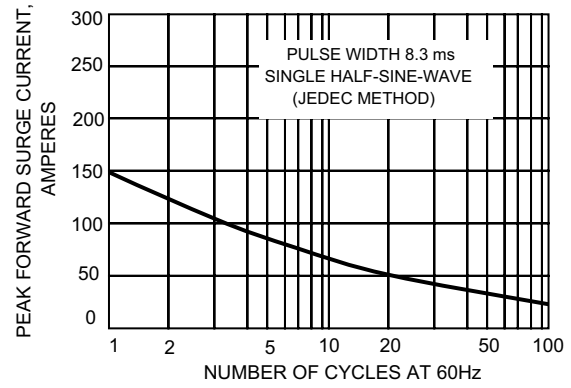


FIG.3-TYPICAL REVERES CHARACTERISTICS

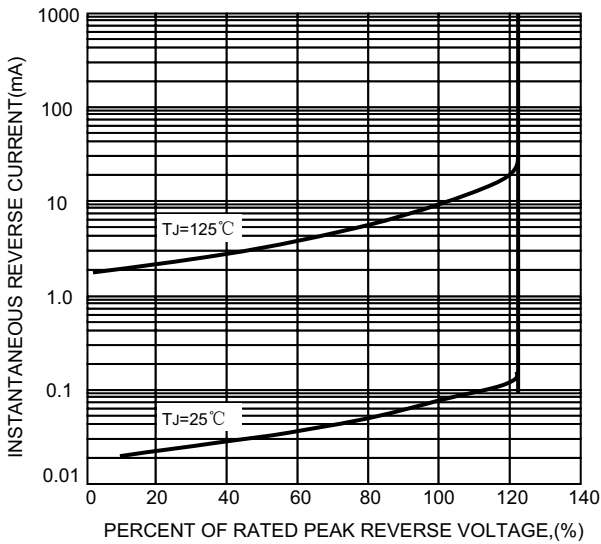


FIG.4-TYPICAL FORWARD CHARACTERISTICS


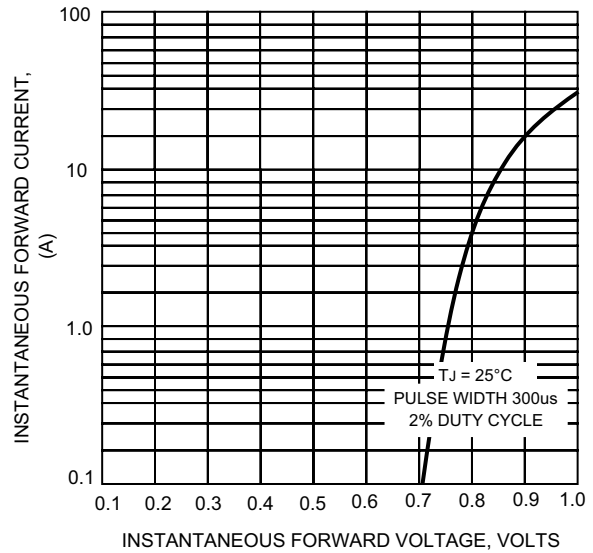



FIG.5 – TYPICAL JUNCTION CAPACITANCE

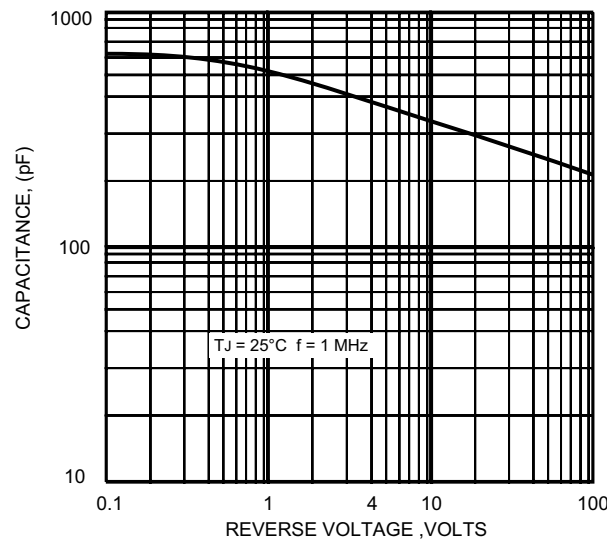

Package Dimension

TO-220

Unit: mm

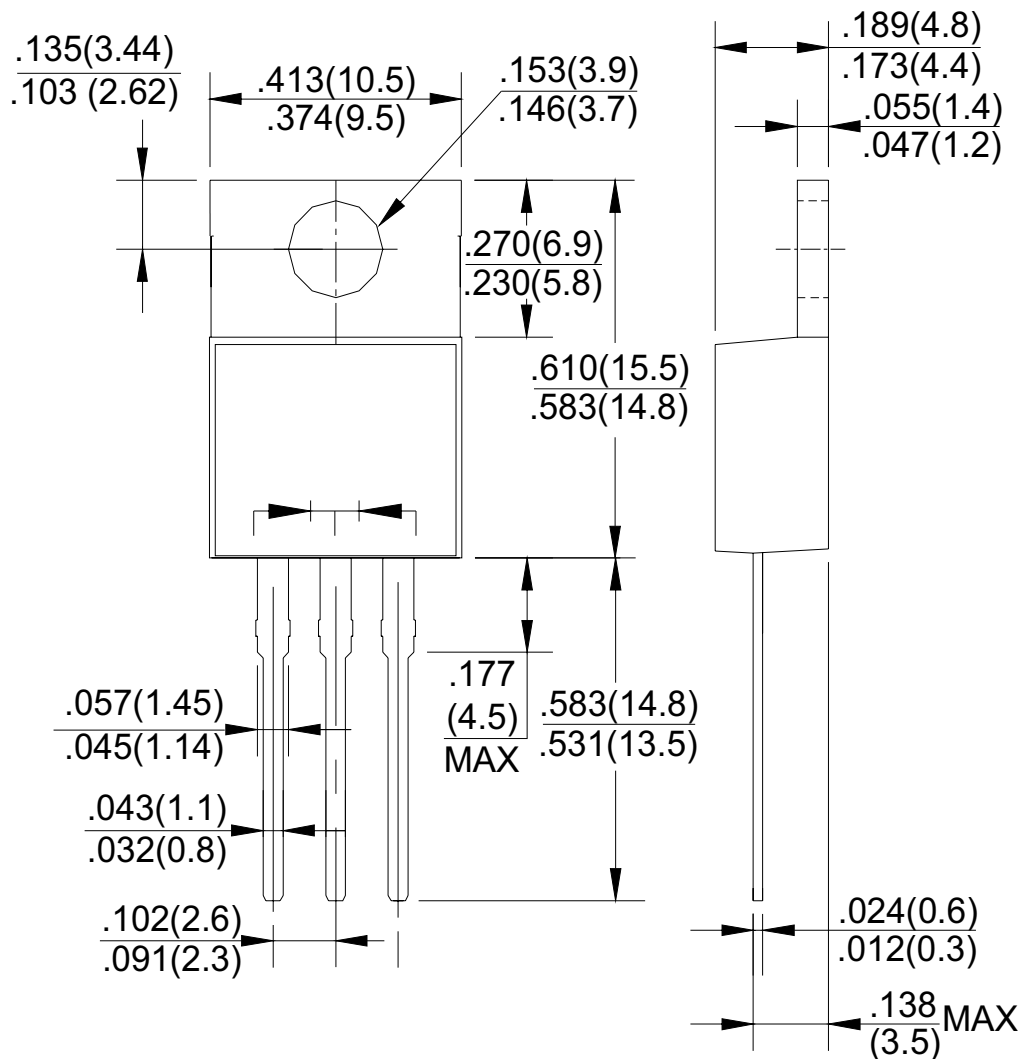

Dimensions in inches and (millimeters)